

# Verso R 3000 U/H/V

Nominal air flow according to ErP 2018, m <sup>3</sup> /h	3450
Panel thickness, mm	50
Unit weight, kg	456
Supply voltage HE, V	3~400
Supply voltage HW, V	3~400
Maximal operating current HE, A	19,8
Maximal operating current HW, A	7,1
Filters dimensions BxHxL, mm	525x510x46
Electric power input of the fan drive at maximum flow rate, W	850
Electric air heater capacity, kW / Δt, °C	9/6,6
Control panel	C5.1
Maintenance space, mm	1000



The photo is intended for informational purposes only. exact details may vary.

## Acoustic data

A-weighted sound power level  $L_{WA}$ , dB(A) at nominal flow rate

Supply inlet	59
Supply outlet	76
Exhaust inlet	59
Exhaust outlet	73
Casing	51


A-weighted sound pressure level  $L_{PA}$ , dB(A)

10 m<sup>2</sup> normally isolated room, distance from casing – 3 m.

Surroundings	40
--------------	----

## Performance (Verso R 3000 UH data)

Supply air filter F7, exhaust air filter M5

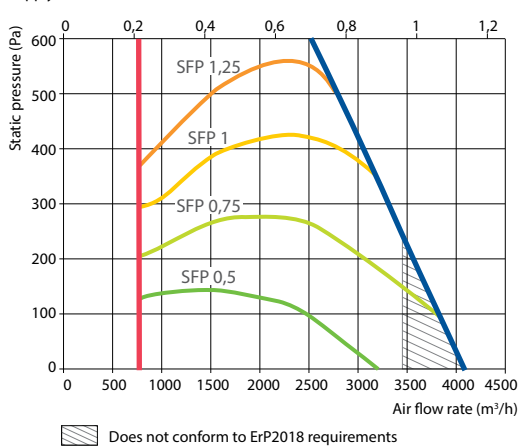

## Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	11,0	13,0	14,2	15,4	16,6	22,7	24,0	25,2


indoor +22°C, 20% RH

## Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


Water temperature in/out, °C	Winter	Summer	Winter	Summer
	Condensation/evaporation T, °C	60/40	7/12	–
Capacity, kW	–	–	45	45/5
Maximal capacity, kW	12,8	21,5	11,5	19,6
Pressure drop, kPa	26,0	21,7	20,4	22,9
Air temperature in/out, °C	2,0	20,5	–	–
Connection, " / mm	11,0 / 22	30 / 18,0	11,0 / 22	30 / 18
Connection, " / mm	1		5/8 / 22	

Summer +30°C/ 50%; DX – 2900 m<sup>3</sup>/h

## Shown as right (R1)

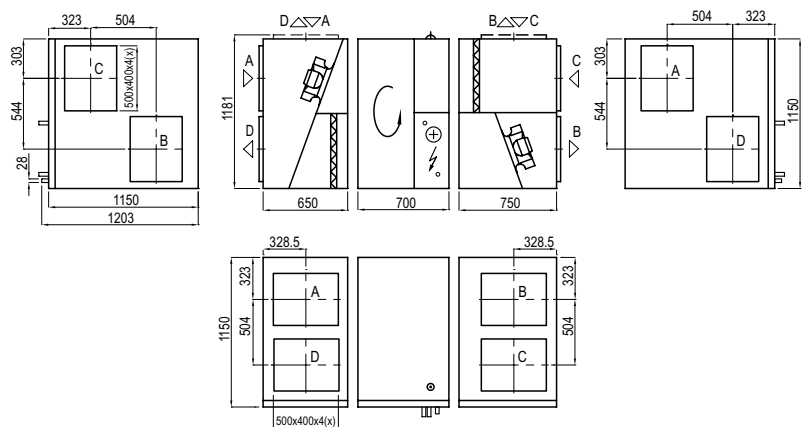

## Shown as left (L1)

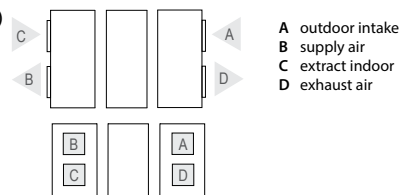

A outdoor intake  
B supply air  
C extract indoor  
D exhaust air

## Accessories (p. 120)

Closing damper	H	SRU-M-400x500+LF24/LM24
	V	SRU-M-500x400+LF24/LM24
Silencer	A/D	STS-IVR3BA-600-500-700-S
	B/C	STS-IVR3BA-600-500-1250-S
PPU		PPU-HW-3R-15-2,5-W2
Air heater-cooler		DCW-3,0-20
2-way valve		VVP45.25-6,3+SSB61
DX cooler		DCF-3,0-20-2
Cooling unit		2xMOU-48HFN6-KA8243