

Verso CF 3500 U/H/V

Nominal air flow according to ErP 2018, m ³ /h	3540
Panel thickness, mm	50
Unit weight, kg	500
Supply voltage HE, V	3~400
Supply voltage HW, V	3~400
Maximal operating current HE, A	19,8
Maximal operating current HW, A	7,1
Filters dimensions BxHxL, mm	525x510x46
Electric power input of the fan drive at maximum flow rate, W	960
Electric air heater capacity, kW / Δt, °C	9/6,8
Control panel	C5.1
Maintenance space, mm	1000



The photo is intended for informational purposes only. exact details may vary.

Acoustic data

A-weighted sound power level L_{wa}, dB(A) at nominal flow rate

Supply inlet	55
Supply outlet	78
Exhaust inlet	56
Exhaust outlet	77
Casing	54


A-weighted sound pressure level L_{pa}, dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	43
--------------	----

Performance (Verso CF 3500 UH data)

Supply air filter F7, exhaust air filter M5

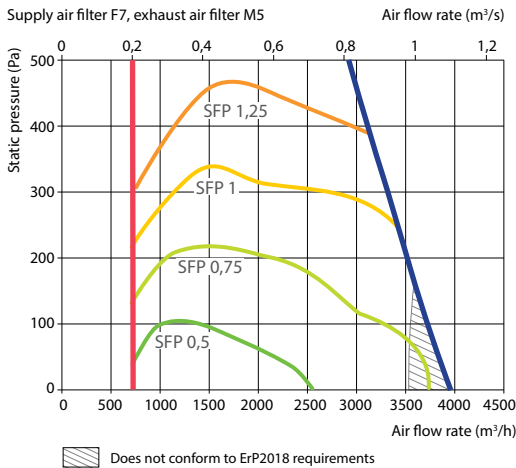

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,0	15,0	15,9	16,3	17,4	22,6	23,7	24,8


indoor +22°C, 20% RH

Changeover water/ DX heating – cooling exchanger (HCW/HCDX)


	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	-	-
Condensation/evaporation T, °C	-	-	45	45/5
Capacity, kW	9,5	17,7	8,2	21,8
Maximal capacity, kW	18,7	17,7	18,3	30,9
Pressure drop, kPa	3,6	96,4	-	-
Air temperature in/out, °C	14,0 / 22	30 / 20,6	14,0 / 22	30 / 18
Connection, " / mm	¾		2x½/2x22	

Summer: 30°C / 50%; DX - 3150 m³/h

Shown as right (R1)

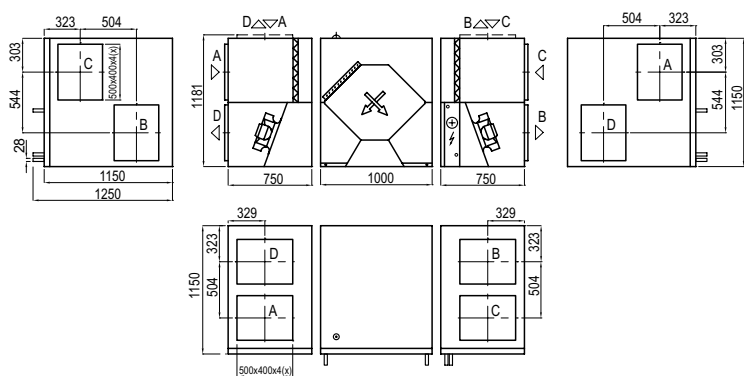

Shown as left (L1)

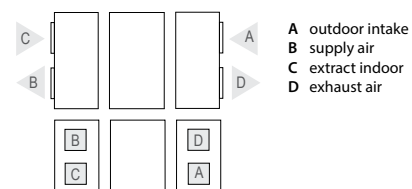

- A outdoor intake
- B supply air
- C extract indoor
- D exhaust air

Accessories (p. 120)

Closing damper	H	SRU-M-400x500+LF24/LM24
	V	SRU-M-500x400+LF24/LM24
Silencer	A/D	STS-IVR3BA-800-500-700-S
	B/C	STS-IVR3BA-800-500-1250-S
PPU		PPU-HW-3R-15-2,5-W2
Air heater-cooler		DCW-4,0-27
2-way valve		VVP45.25-6,3+SSB61
DX cooler		DCF-4,0-27-2
Cooling unit		2xMOU-48HFN6-KA8243